



## The PR Series

**3 Input Channel Mixer Amplifier: From 7.5 to 125 Watts of Continuous RMS Power**  
**PR15A • PR30A • PR60A**

### FEATURES


- 15, 30, or 60 Watts of Continuous RMS Power
- LCD Digital Display
- 5 AM / 5FM Station Memory Presets.
- Auto Station Search
- Built-in Antenna & Provision for External Antenna
- Slim 2U design
- “Music-On-Hold” Feature Perfect for Stores, Shopping Centers, and Any Environment that Uses Repeating Messages throughout the Building and/or over the Phone
- Rack Mountable with RP-2U Kit
- 5 Year Warranty & 30 Day Money Back Guarantee.

The versatile **PR Series** combines the flexibility of the popular **Grommes~Precision** MICRO mixer amplifier series with a digital tuner. Thus, becoming an all-in-one solution to a common audio application: providing background music (whether from the on-board tuner or auxiliary) with paging via microphone and/or telephone. It also includes a separate “Music-On-Hold” input that is perfect for stores, shopping centers, and any environment that uses digital message repeaters. The message can be sent to just the telephone system and/or to the main speaker line itself. Perfect for convenient stores and shopping centers.

The **PR Series** features a liquid crystal display with 5 AM and 5 FM preset station memory and auto station search selector. In addition, it features 3 input flexible channels (1 mic, 3 aux, Tuner, 1 600 ohm/Tel-Page) which are capable of pumping 15, 30, and 60 watts of continuous RMS power into 4 ohm, 25V, or 70.7V speakers with low distortion, wide frequency response, and full range bass and treble controls. Plus, the **PR Series** automatically mutes the aux or tuner channel when the page or mic channel is activated.


Designed for bulletproof operation, the **PR Series** is packed with safeguards to ensure long-life, including a built-in circuit breaker and thermal and current limiting. With over a half-century of experience in the industry, **Grommes~Precision** backs the **PR Series** with its unbeatable expertise and Precision Assurance Pledge: a **5 year warranty** and a **30 day money back guarantee**.

	PR Series
<b>POWER OUTPUT RMS</b>	15W / 30W / 60W
<b>DISTORTION @RPO</b>	≤0.3%
<b>OUTPUTS</b>	4-8 ohm / 25V & 70.7V / BOOSTER
<b>FREQUENCY RESPONSE DIRECT</b>	+/-1dB 20-20kHz
<b>LINE</b>	+/-1dB 50-15kHz
<b>INPUTS</b>	1-MIC;3-AUX; 600 ohm/TEL-PAGE
<b>TONE</b>	BASS AND TREBLE
<b>MICROPHONE</b>	SCREW TERMINALS
<b>DIMENSIONS</b>	16.5"Wx4.5"Hx11.25"D
<b>WEIGHT</b>	13LBS / 14LBS / 19LBS

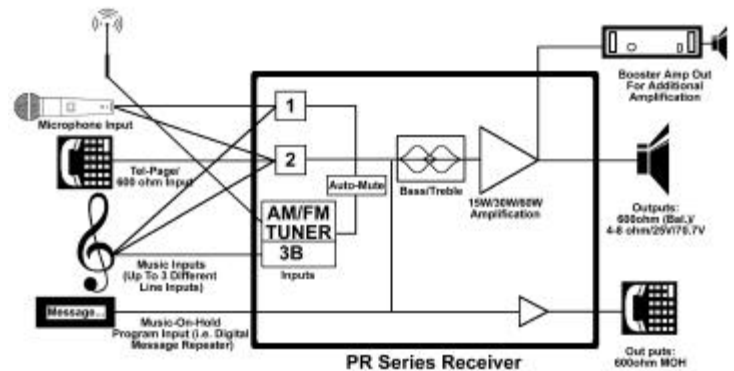



# Grommes~Precision Precision Electronics

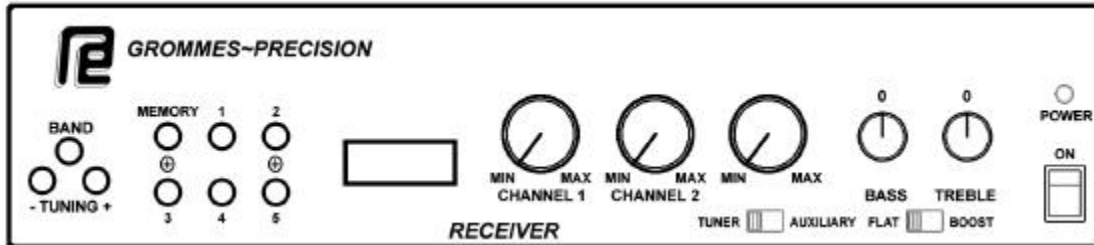

## PR15A & PR31A



## Grommes~Precision

847-678-5350 800-SINCE-46 FAX: 847-678-0511

9101 King Ave. Franklin Park, IL 60131 USA

[www.grommesprecision.com](http://www.grommesprecision.com)

Grommes~Precision

Grommes~Precision is an American manufacturer of original, custom, and private labeled audio/electronic equipment for use in commercial, consumer, and industrial applications since 1946.