



# Grommes~Precision



## IFPA-3

### 2 Channel Power Amplifier

The IFPA-3 is a convection cooled 2 channel amplifier, designed for continuous duty. Each channel input has an XLR 600 Ohm balanced input and an 1/4" parallel jack connection to run both channels from the same source. The output connections are made through Speakon connectors. The unit includes a low cut filter designed to reduce the harmful low frequencies that can damage horn style speakers. Packed with safeguards to ensure long-life, including: short circuit, current limiting, peak overload, and thermal runaway.

Plus, with over a 70 years of experience in the industry, **Grommes~Precision** backs the **IFPA Series** with its unbeatable expertise and Assurance Pledge: a **7 year warranty** and a **30 day money back guarantee**.

*Grommes~Precision proudly producing since 1946.*

	IFPA-3
POWER OUTPUT RMS	370W / Channel @4 Ohm
DISTORTION @RPO	≤0.15%
LOW CUT FILTER	Low Cut Horn Protection
OUTPUTS	Chassis Mounted Neutrik Speakon
FREQUENCY RESPONSE	+/-1dB 20-20kHz
INPUTS	XLR-600 OHM Balanced (2-1/4" Jack in Parallel)
RACK UNITS	2U
DIMENSIONS / WEIGHT	19"Wx3.5"Hx11"D / 24LBS

### FEATURES

- Commercial Industrial Grade Design
- Independent 600 ohm Inputs that can be paralleled
- Built Tough: Multiple Protections Including Short Circuit, Current Limit & A/C Circuit Breaker
- Heavy Duty Power Supply Designed for Continuous Operation
- Rack Mount Standard, Slim 2U Rack Design
- Convection Cooled—Reliable “No Maintenance” Design
- 7 Year Warranty & 30 Day Money Back Guarantee



## Grommes~Precision

847-599-1799 · 800-SINCE-46 · FAX: 847-599-6178

1331 Estes Ave. · Gurnee, IL 60031 · USA


[www.grommesprecision.com](http://www.grommesprecision.com)

Grommes~Precision

## IFPA-3 FRONT PANEL



## IFPA-3 REAR PANEL

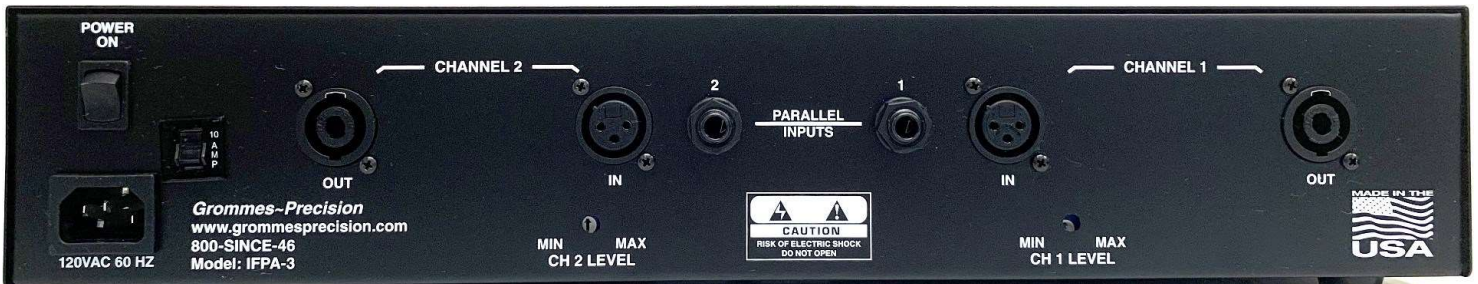

**Grommes~Precision**

# **Grommes~Precision**

847-599-1799 · 800-SINCE-46 · FAX: 847-599-6178

1331 Estes Ave. · Gurnee, IL 60031 · USA

[www.grommesprecision.com](http://www.grommesprecision.com)